




Architecturally Flexible and Attractive



Our Panels
Look GREAT
On Your Designs!

**Ultra-Light Weight
Solar Water Heating
Panels are Available in 26
Trim Colors to Match
Exterior Decor and Design.**

- * SRCC OG-100 & OG-300 Certified Systems
- * Open Loop w/Potable Water & Closed Loop w/Food-Grade Propylene Glycol Systems
- * Finished 27 mil Aluminum Trim and Frame in 26 Colours
- * "Clear Crystal" Absorber Coating on Copper Fins
- * Twin-wall, UV treated Polycarbonate Glazing
- * .3 Gallon Fluid Capacity
- * .20 to .35 GPM Recommended Flow Rates
- * 150psi Maximum Working Pressure
- * 250° F Maximum Stagnation Temperature
- * 1/2" OD Copper Tubing for Connections
- * 6' Collector Weighs 19 lbs Empty - 21 lbs Full
- * 12' Collector Weighs 38 lbs Empty - 40 lbs Full
- * Qualifies for Federal and State Rebates

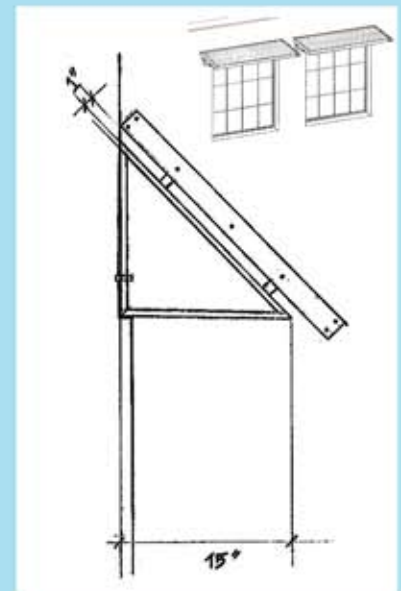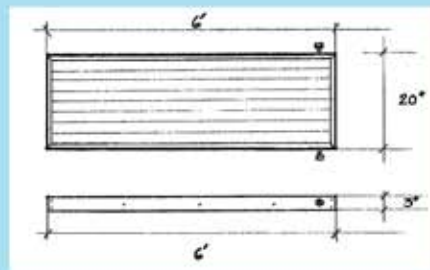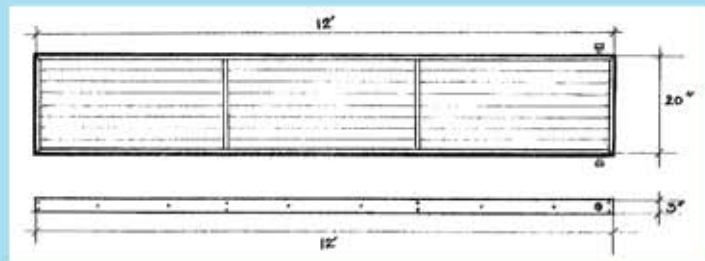

**Commercial
Residential
Industrial**

1-800-545-3121

www.PowerPartnersSolar.com